



Agrotextiles



Biodegradables



Geotextiles



Specialist





Wildlife



Living Walls &
Roofs



Accessories

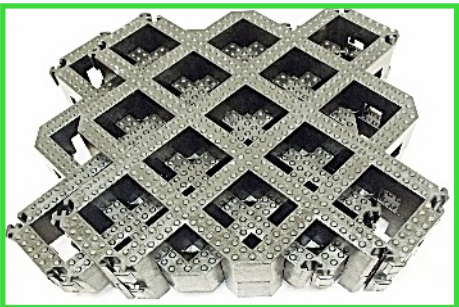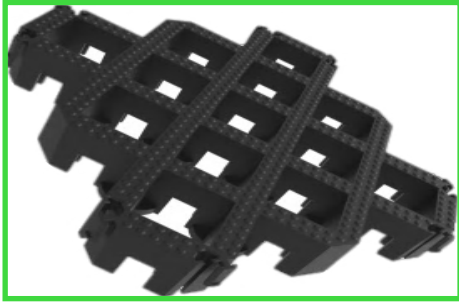

Hy-Pave Heavy

Hy-Pave Heavy is a strong versatile ground paver tile designed for HGV use. The interlocking pavers can withstand weight of up to 40 tonnes and can be filled with either grass or gravel infill.

SuDS compliant and specifically designed to allow water to drain away whilst special pockets retain some water. This prevents grass from getting waterlogged and helps prevent grass from dying through lack of water.

Hy-Pave Heavy is the ideal heavy duty paver for permanent and overspill coach or HGV parking applications. This product is easy to install and offers significant savings over conventional cast concrete systems. Hy-Pave Heavy has both high compressive strength and high shear strength which enables the tiles to withstand much higher loading, accelerating, braking and turning forces than other heavy duty pavers. The textured surface allows for improved grip and as a result improves user safety.

Features/Benefits:

- Designed for use with HGV Traffic and textured surface for improved grip
- High shear strength reduces limitations whilst accelerating, braking and turning
- Easy to install and maintain and reduces sub base depths
- Cost effective alternative to concrete and tarmac surfaces
- High water permeability and a range of fill options
- Sympathetic to the natural environment and wheelchair regulations compliant
- Ideal for carparks, hardstandings, footpaths & verges, pedestrian areas, bridge abutments and access roads.

Feature	Hy-Pave Heavy
Nominal Size	500 x 500 x 80mm (+0/-3%)
Coverage Rate	4 blocks/m ²
Unit Weight	3.9 kg (15.6kg/m ²)
Infiltration Rate (Gravel-filled)	> 250cm/hour
Run Off Coefficient Range	0.05 - 0.4
Infill Surface Area	> 55%
Compressive Strength (gravel-filled)	3000 kN/m ²


Made in UK from recycled polyethylene

Application Categories: Grass Reinforcement and Porous Paving


Hy-Tex (UK) Limited
Aldington Mill, Mill Lane,
Aldington, Ashford, Kent
TN25 7AJ

01233 720097
sales@hy-tex.co.uk
www.hy-tex.co.uk
01233 720098



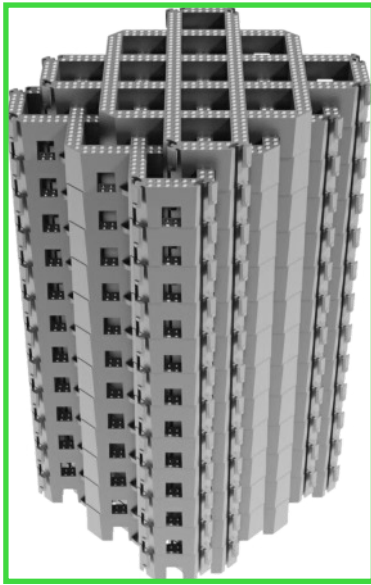

**Interlocks on the pallet
to minimise transport
& storage costs**

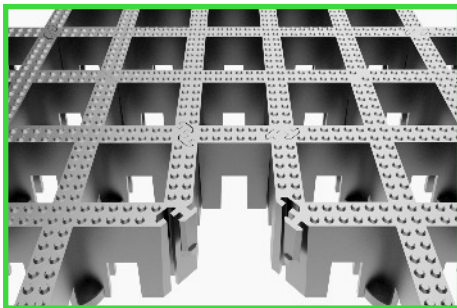

Note: The above information is an illustration only and in no way to be construed as a design. It is supplied in good faith but without any form of warranty. It does not form part of any contract or any intended contract with the Buyer/User. Hy-Tex Standard Trading Terms and Conditions

Hy-Pave Heavy Installation Instructions

Subgrade

Excavate to formation level as indicated on the drawing, providing a minimal (1:30 - 1:100) fall to the drainage collection system. Compact subgrade, using either a vibrating roller or vibrating plate, making good soft spots with suitable material.

For Attenuation Systems

If the exposed subgrade surface displays hollows and/or sharp protrusions (and is therefore unsuitable for the direct installation of the geomembrane) then the specified geotextile should be incorporated above and beneath the geomembrane, to afford protection.

Installation of the specified geomembrane system must be by an approved welding technique, with the benefit of a comprehensive on-site CQA (Control Quality Assurance) procedure. Install the specified AquaCrate drainage network in accordance with the detail design.

For Infiltration Systems

Lay the specified geotextile, overlapping the joints by 200mm, ensuring that sufficient geotextile protrudes beyond the anticipated wearing course level to allow final trimming.

Sub-base

Use granular material (crushed gravel, rock or concrete) as specified, which must be sound, clean, non friable and free from clay or other deleterious matter. Install the designed depth of sub-base as specified, in layers not greater than 200mm thick, (taking care not to puncture the underlying membrane within the Attenuation System). Compact each layer in turn with a vibratory plate, type DVP 75/22" plate, or suitable roller. Overlay the sub-base with the specified geotextile, overlapping the joints by 200mm.

Bedding Layer (if required)

Lay, screed and compact to level, a 30mm depth of appropriate bedding layer material (sharp sand). The requirement for, and selection of, the bedding layer material is entirely dependant upon the application and design criteria of the specific project. For grass reinforcement mix the bedding layer 4:1 with a good quality top soil to ensure good root growth.

Wearing Course

Hy-Pave Heavy should be laid such that each modular unit slots into its neighbouring units. Once a fully interlocked matrix has been formed, then the specified rootzone/grass seed infill material or natural aggregate should be used to infill each cell such that a continuous, permanently porous, high load bearing structure is thereby created.

For Sand Bed

A good quality compacted silica sharp sand should be used approximately 30mm thickness after compaction.

For Gravel Fill

Aggregate size should not exceed 15mm and should ideally not be below 6mm (typically 10mm single sized crushed rock). The use of an angular gravel rather than a river washed rounded gravel will aid compaction and prevent migration from the units.

For Grass Fill

A good quality topsoil should be used to infill the units to the top and allowed to settle; grass seeding followed immediately by a top dressing of a good quality fertiliser should ensure adequate grass growth.

Seeded areas should be regularly watered for a period of 6 weeks following installation.

Application Categories: Grass Reinforcement and Porous Paving